




HEPU Saw unit and hydraulic press

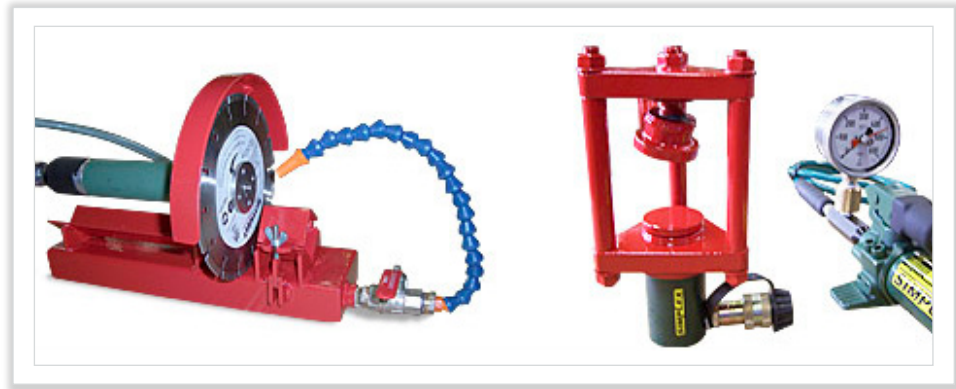

Saw unit, type HEPU-SEH 0.7 kW

Including bourbon tube pressure gauge up to 250 bar with drag indicator, glycerine fill, stainless steel housing, Ø 100 mm, with cleaning connection, including air motor 0.7 kW, speed (loaded) 10,000 min⁻¹, speed (empty) 20,000 min⁻¹, including collet, compressed air hose, sheathed 2.5 m, with lubricator.

Hydraulic press, type HEPU-HP-1.8-700 for concrete testing

Including hydraulic hand pump, 2-level, max. operating pressure 1st level 13.8 bar, 2nd level 700 bar, pressure limiting valves can be installed from outside, including single-acting cylinder with spring suck-back, ultimate load 10 t, stroke 54 mm, usable piston surface 14.5 cm², necessary oil volume 78.7 cm³, weight 2.2 kg, including high-pressure hose

Date: March 2007, technical changes reserved.